



冷媒用管フランジ（銅管用）

RBK

型 式	材質
RBK 10A~65A	S25C

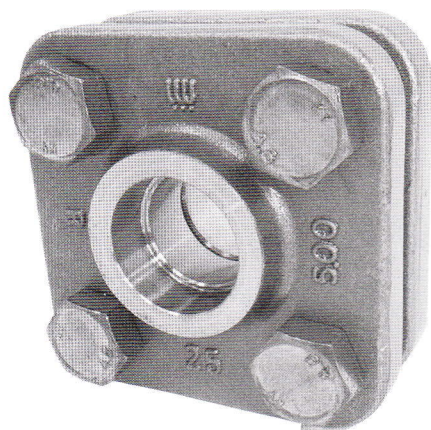

10A~65A
差込み銀ろう付

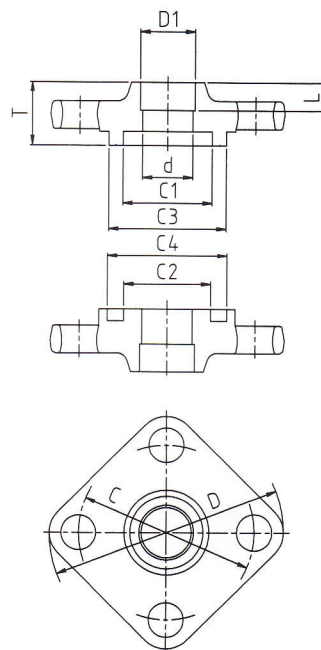

型 式 Type	継 手 Connection in	寸 法 mm Dimensions											重 量 kg Weight	最 高 使 用 圧 力 MPa MWP
		D	d	D1	L	C1	C3	C2	C4	T	C	h		
RBK10A 19.05	3/4	90	17.1	19.3	10	28	38	27	39	25	65	15	5.0	0.80
RBK15A 22.22	7/8	95	19.8	22.4	12	32	42	31	43	25	70	15		1.18
RBK20A 25.40	1	100	22.6	25.6	12	38	50	37	51	27	75	15		1.44
RBK20A 28.58	1-1/8	100	25.9	28.9	12	38	50	37	51	27	75	15		1.44
RBK25A 31.75	1-1/4	125	28.6	32.0	12	45	60	44	61	32	90	19	4.15	2.24
RBK25A 34.92	1-3/8	125	31.4	35.2	14	45	60	44	61	32	90	19		2.24
RBK32A 38.10	1-1/2	135	34.5	38.3	14	55	70	54	71	34	100	19		2.80
RBK40A 41.28	1-5/8	140	37.3	41.5	14	60	75	59	76	34	105	19	3.15	3.15
RBK50A 50.80	2	155	45.8	51.1	19	70	90	69	91	38	120	19		4.65
RBK50A 53.98	2-1/8	155	48.9	54.2	19	70	90	69	91	38	120	19	4.65	
RBK65A 66.68	2-5/8	175	59.7	67.0	22	90	110	89	111	40	140	21	5.20	5.20
RBK65A 79.38	3-1/8	175	72.3	79.7	22	90	110	89	111	40	140	21		5.20

*詳細はJISB8602（1999）冷媒用管フランジによる。
*組フランジには、ボルト・ナット・パッキンが付属します。